

MK-DS SERIES DIGITAL SCROLL COMPRESSED AIR DRYER







Mikropor began its journey in 1987 with a passion to create "Tomorrow's Technology" and has become one of the leading manufacturers of atmospheric air filtration solutions and compressed air treatment systems for a variety of industries.

By closely following the latest developments in technology, Mikropor's "Best in Class" products and solutions are appreciated by customers in more than 140 countries.

The company's sustainable growth has been provided by its passion for innovation and commitment to quality, as well as its dedication to technology. Mikropor is an environmentally conscious company that values people, while developing products that extend the needs and expectations of customers.

With this mission, Mikropor continues to become one of the most recognized brands in the world by expanding its global penetration in the field of technological filtration and contributes to a healthier planet.

MK-DS SERIES DIGITAL SCROLL AIR DRYER

Each and every compressed air user around the world has been looking for a complete solution to associate the best practices of energy management with their refrigerated air dryers, not just to protect the environment, but also to save money on operating costs.

Mikropor is proud to announce that the new MK-DS series explicitly prevails over any other type of refrigerated air dryer by achieving everyone's goal to lower energy costs.

The MK-DS Series, with a specially designed heat exchanger and digital scroll compressor, provides unrivalled energy efficiency in a refrigerated air dryer.

The challenge of maintaining a stable dewpoint and saving energy can be overcome with this latest technological development.

Combining Mikropor's expertly designed heat exchanger, leading filtration technology and digital scroll compression in Mikropor's MK-DS dryers provides the ultimate energy efficiency solution for compressed air systems with varying levels of air demand.





ADVANTAGES


- Best in Class energy saving
- Refrigeration systems are designed with digital scroll compressors and have an automatic switch to control loaded and unloaded states according to real-time air load demand during system operation in order to maximize energy savings.
- Advanced and user friendly electronic control system
- Electronic expansion valve
- Fan speed control
- Integrated filters
- Low pressure drop
- Energy efficiency is maximized through the design of the exclusive aluminium plate type heat exchangers.
- The advanced digital scroll compression technology not only improves efficiency, durability and reliability but also lowers the decibel sound levels compared to a standard refrigerated air dryer.
- Environmentally friendly low-pressure R-134a refrigerant gas is used in digital scroll compressor to pressurize the system.
- The smart control unit named kW-DS Controller provides high energy efficiency with electricity consumption optimized for variable capacities.







PERFORMANCE

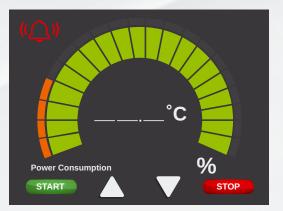

The advanced digital scroll technology utilized in Mikropor's MK-DS Series dryers maintains a stable pressure dew point while performing **up to 91% energy savings** during operation.



DIGITAL SCROLL TECHNOLOGY

How It Works?

Unlike most refrigerated dryers in the industry, Mikopor's MK-DS series utilize a proprietary digital evaporator technology to deliver significant energy savings over traditional cycling and variable speed designs.

This brand new technological breakthrough offers a vital opportunity to save the highest amount of energy possible in a refrigerated air dryer. The digital compressor operates with various different ranges of inlet flow conditions which also makes it by far the most energy efficient compressor to be utilized in a refrigerated air dryer.


MK-DS Dryers are equiped with a true no-loss condensate drain which provides effective condensate removal without any loss of (valuable) compressed air.

Maximum energy savings are achieved by establishing continuous communication with the temperature probe in the evaporator which adjusts the refrigeration pressure to the temperature of the air exiting the evaporator.



Fundamental Components of the MK-DS Series

- Digital Scroll Compressor
- Electronic Expansion Valve
- Variable Speed Fan Motor
- Highly Engineered Control Algorithm
- Cutting-Edge Technology Electronic Controller

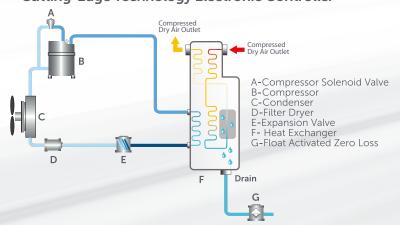



Mikropor's latest MK-DS series refrigerated dryer technology saves the highest amount of energy possible on the market.

Why is MK-DS so energy efficient and cost effective?

Non-cycling refrigerated dryers are designed to run continuously and consume almost 100% of the nominal power at all loads. Hence, it makes no difference if a facility is operational or not - A non-cycling dryer will just keep running, regardless of the air demand at any given time. As mentioned above, digital scroll technology equipped dryers can be loaded or unloaded automatically depending upon the real-time air load demand and this feature simply makes the MK-DS range much more energy efficient than any other type of refrigerated air dryer.

DIGITAL SCROLL TECHNOLOGY

With the energy savings calculation tool, the users can compare how much energy can be saved for different dryer selections.

| ENERGY SAVING CALCULATION | | | | | | | | | |
|---------------------------|---|-------|------------------------------|--|--|--|--|--|--|
| Energy Unit Price | 0,06 | €/kWh | | | | | | | |
| Daily Working Hours | 24 | hour | | | | | | | |
| Monthly Working Days | 30 | day | | | | | | | |
| SELECTED AIR DRYER MODELS | | | | | | | | | |
| | DIGITAL SCROLL AIR DRYER MK-DS 260 | VS | STANDARD AIR DRYER MKE 12500 | | | | | | |
| Monthly Ener. Consumption | 6882 kWh | | 13417 kWh | | | | | | |
| | | | | | | | | | |

| Total Power Savings | | Total Power Savings Annual | Total Cost Saved Annual | |
|----------------------------|-----|-----------------------------------|--------------------------------|--|
| | 49% | 78415 kWh | € 4.705 | |

Energy Saving Example

Consider a 12500 Nm3/h non-cycling refrigerated air dryer running continuously for 720 hours monthly at an average energy cost of €0.06 per kWh.

In this scenario the non-cycling air dryer will consume 13417 kWh of electricity.

An equivalent MK-DS air dryer, rated at 12500 Nm/h operating at the same conditions over the same period, would consume 6882 kWh.

Consequentially the MK-DS air dryer will achieve energy savings of € 4.705 compared to a non-cycling air dryer per annum.

MK-DS Series - Technical Specifications

| Model | Capacity (m³/h) | Voltage | Connection Size | Filter Quantity and Type | Replacement Filter Element Kit | Control Type |
|---------------------------------------|--------------------|---------------------|-----------------------------|--|-----------------------------------|-----------------|
| MK-DS-120 | 930 | 400V / 3 Ph / 50 Hz | 2" | 1*GKON1205X + 1*GKON1205Y | MKON1205 KIT | μΡς |
| MK-DS-130 | 1200 | 400V / 3 Ph / 50 Hz | 2" | 1*GKON1205X + 1*GKON1205Y | MKON1205 KIT | μΡς |
| MK-DS-140 | 1388 | 400V/3Ph/50Hz | 3" | 1*GKON-HC-1805X + 1*GKON-HC-1805Y | MKON-HC-1805 KIT | μΡς |
| MK-DS-150 | 1800 | 400V / 3 Ph / 50 Hz | 3" | 1*GKON-HC-1805X + 1*GKON-HC-1805Y | MKON-HC-1805 KIT | μΡς |
| MK-DS-170 | 2775 | 400V / 3 Ph / 50 Hz | 3" | 1*GKON-HC-2775X + 1*GKON-HC-2775Y | MKON-HC-2775 KIT | μΡς |
| MK-DS-180 | 3330 | 400V / 3 Ph / 50 Hz | DN100 Flange | 1*GKO5850X + 1*GKO5850Y | GKO5850 KIT | μPc |
| MK-DS-190 | 3915 | 400V / 3 Ph / 50 Hz | DN100 Flange | 1*GKO5850X + 1*GKO5850Y | GKO5850 KIT | μΡς |
| MK-DS-200 | 5085 | 400V / 3 Ph / 50 Hz | DN100 Flange | 1*GKO5850X + 1*GKO5850Y | GKO5850 KIT | μPc |
| MK-DS-210 | 5850 | 400V / 3 Ph / 50 Hz | DN100 Flange | 1*GKO5850X + 1*GKO5850Y | GKO5850 KIT | μPc |
| MK-DS-220 | 6975 | 400V / 3 Ph / 50 Hz | DN150 Flange | ** Externally Connected - F6500 X / Y | 6*M1200 KIT | μPc |
| MK-DS-230 | 7875 | 400V / 3 Ph / 50 Hz | DN150 Flange | ** Externally Connected - F8500 X / Y | 8*M1200 KIT | μPc |
| MK-DS-240 | 9000 | 400V / 3 Ph / 50 Hz | DN150 Flange | ** Externally Connected - F11000 X / Y | 10*M1200 KIT | μPc |
| MK-DS-250 | 10500 | 400V / 3 Ph / 50 Hz | DN200 Flange | ** Externally Connected - F11000 X / Y | 10*M1200 KIT | μΡς |
| MK-DS-260 | 12500 | 400V / 3 Ph / 50 Hz | DN200 Flange | ** Externally Connected - F14000 X / Y | 14*M1200 KIT | μРс |
| Nominal Working Pressure 7 barg | | 7 barg | Minimum Inlet Temperature | 5°C | | |
| , , , , , , , , , , , , , , , , , , , | | 16 barg | Nominal Ambient Temperature | 25°C | | |
| | | 4 barg | Maximum Ambient Temperature | 50°C | | |
| Nominal Inlet Temperature 35 | | 35°C | Minimum Ambient Temperature | 5°C | | |
| Maximum Inlet Temperature 60°C | | 60°C | Refrigerant | R134a | | |

MK-DS SERIES DIGITAL SCROLL COMPRESSED AIR DRYER



Ahi Evran OSB Mah. Oğuz Cad. No: 5 Sincan, 06935, Ankara-Turkey

in
mikropor

www.mikropor.com