



mikropor


New-Generation **Spin-On Air/Oil Separators**

eXtra competitive



www.mikropor.com

General Features

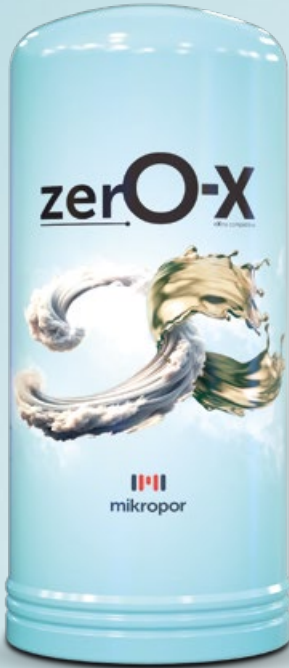

- Effective performance and extended lifespan with low pressure drop for industrial applications
- Design ensuring optimum efficiency
- Superior resistance to corrosion and high-strength structure
- High efficient separation process



Model	Max. Flow Rate (m ³ /min @ 7 barg)	Diameter 1 (mm)	Diameter 2 (mm)	Height (mm)	Max. Working Pressure (barg)
Zero-X-30	2	Ø97	Ø100	214	14
Zero-X-60	3	Ø138	Ø141	192	14
Zero-X-70	6	Ø138	Ø141	314	14

Valid for the Zero-X Models

- Initial Pressure Drop: 150 mbar
- Average Recommended Service Life: 4000-8000 hours
- Recommended Pressure Drop for Separator Change: 1 bar

* Mikropor reserves the right to change all or any part of the design in an individual case or in general, at any time without notice.